

## Check Valves | 2887 - 20 mm Check Valve OV205

### Features

- Easy to insert
- 100% factory tested for sealing operation
- low headloss
- low cracking pressure
- External oring groove
- Spring loaded plunger

### Check Valve External Dimensions


OD#1	19.50
ID	12.50
Height	21.90

### Materials

Outer Cap	Acetal
Inner Core	Acetal
Plunger	Acetal
Body	Acetal
Spring	304 S/S
Seal	EPDM 5613
O'ring	EPDM 5711

### FLOW RATE CURVE

#### RATED FLOW vs PRESSURE LOSS

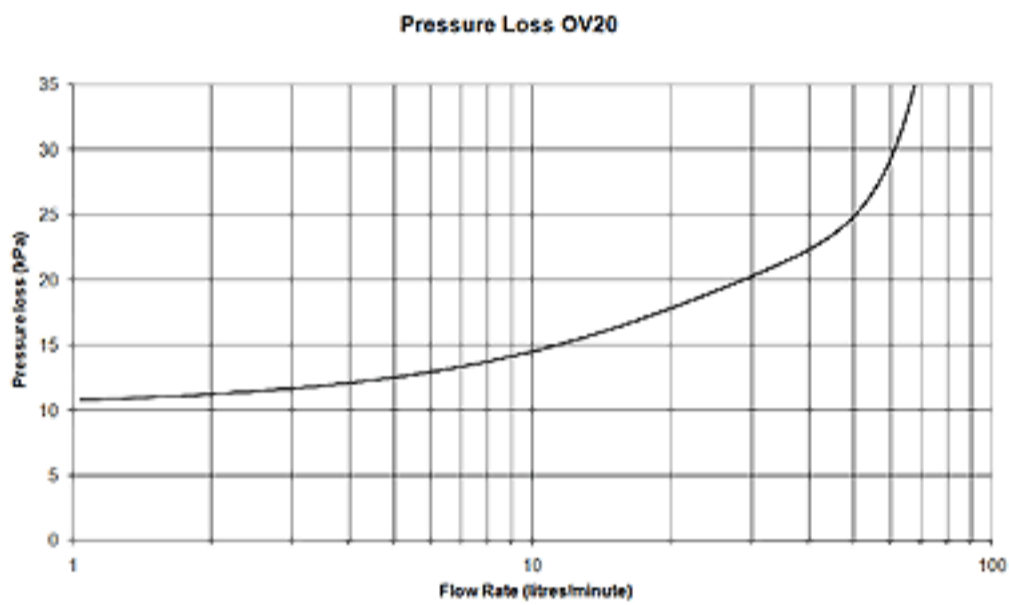

### Certification

Potable Water	AS4020
---------------	--------

### Performance

### Technical Data

#### Service Temperature

Max C	90
Min C	0

#### Service Pressure

Max Kpa	2000
Min Kpa	0

Fluid	Clean Water
-------	-------------

#### Opening Pressure

