

**Check Valves | 4143 - 25 mm Check Valve OV25HT**

## Features

- ✓ Easy to insert
- ✓ 100% factory tested for sealing operation
- ✓ low headloss
- ✓ low cracking pressure
- ✓ External oring groove
- ✓ Spring loaded plunger
- ✓ Outstanding high temperature resistance
- ✓ Locking tabs - no retainer required

## Check Valve External Dimensions

OD#1	25.75
ID	16.00
Height	27.40

## Materials

Inner Core	Ultem
Plunger	Ultem
Body	Ultem
Spring	304 S/S
Seal	EPDM 5711
O'ring	EPDM 5711

## FLOW RATE CURVE

## Certification

Potable Water

Performance

## Technical Data

## Service Temperature


Max C	150
Min C	0

## Service Pressure

Max Kpa	2000
Min Kpa	0

Fluid Clean water and steam

## Opening Pressure

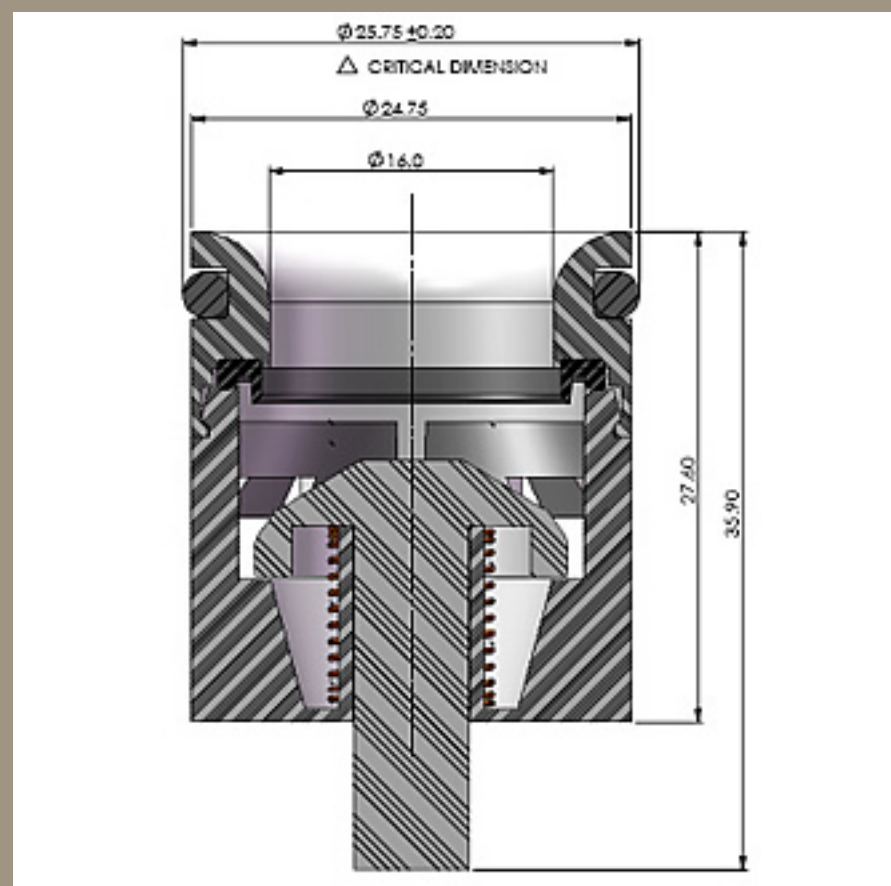

## NON RETURN VALVE

